

DUO LINE TOP BEND - FDT011616

Up and down light emission ensures balanced, shadow-free illumination, enhancing both architectural aesthetics and ambient uniformity. The high-grade silicone housing provides excellent UV resistance, thermal stability, and durability, making it suitable for long-term indoor and outdoor applications. Its robust construction and uniform light output make it ideal for applications such as façade outlining, cove lighting, and pathway illumination, delivering both functional and decorative lighting solutions.



Cuttable



One Bin



UV protected



Solvent Resistant



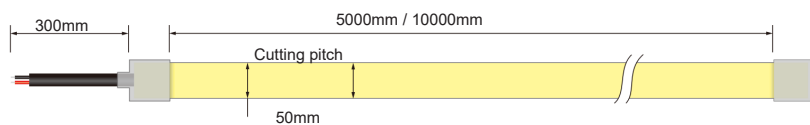

Saltwater Resistant

2700K
3000K
4000K
6000KCRI
Ra > 90

DIMMABLE

IP Rated
IP 65

CE

DIMENSION**TECHNICAL PARAMETERS**

Input Voltage	12V DC 24V DC
Wattage	18W/m
Lumens Output	624lm A 3999/K
Colour Temp.	2700K 3000K 4000K
CRI	>90
MacAdam Step	≤2 SDCM (binning consistency)
IP Rating	IP65 IP67
Operating Temp.	-20°C to +55°C
Reel Length	5m 10m
Cutting Pitch	50mm
Lifespan	>50,000 hrs
Dimmable	TRIAC 0-10V DALI
Material	Dow SILASTIC™ ET-7021

END CAPS & CABLE LEAD OPTIONS

Front Cable Entry



Bottom Cable Entry



Closed End Cap

ACCESSORIES

Aluminium Profile

ORDERING CODE

ARC – FDT011616 – 24V – 3000K – 90CRI – IP65 – 10M
[Brand] – [Series] – [Voltage] – [CCT] – [CRI] – [IP Rating] – [Length]