



## 360 BEND - FR010113

The 360° bend neon flexible delivers uniform all-around illumination with seamless light distribution. the 360° bending capability allows smooth curves and circular designs, making it ideal for creative lighting applications. Featuring a dust-resistant matte finish, it ensures a clean and consistent appearance. With an IP65 rating, it is suitable for indoor decorative and artistic use, supporting versatile installation methods for dynamic lighting designs.

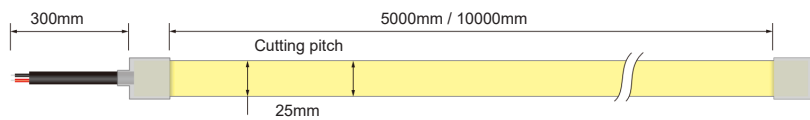

## DIMENSION



## TECHNICAL PARAMETERS

|                 |                               |
|-----------------|-------------------------------|
| Input Voltage   | 12V DC   24V DC               |
| Wattage         | 10W/m                         |
| Lumens Output   | 518lm/m @ 3000K               |
| Colour Temp.    | 2700K   3000K   4000K         |
| CRI             | >90                           |
| MacAdam Step    | ≤2 SDCM (binning consistency) |
| IP Rating       | IP65   IP67                   |
| Operating Temp. | -20°C to +55°C                |
| Reel Length     | 5m   10m                      |
| Cutting Pitch   | 25mm                          |
| Lifespan        | >50,000 hrs                   |
| Dimmable        | TRIAC   0-10V   DALI          |
| Material        | Dow SILASTIC™ ET-7021         |

## END CAPS & CABLE LEAD OPTIONS




Front Cable Entry




Closed end cap

## ACCESSORIES



PC Profile



PC Clips

## ORDERING CODE

ARC – FR010113 – 24V – 3000K – 90CRI – IP65 – 10M  
 [Brand] – [Series] – [Voltage] – [CCT] – [CRI] – [IP Rating] – [Length]