

360 BEND - FR010125

The 360° bend neon flexible delivers uniform all-around illumination with seamless light distribution. the 360° bending capability allows smooth curves and circular designs, making it ideal for creative lighting applications. Featuring a dust-resistant matte finish, it ensures a clean and consistent appearance. With an IP65 rating, it is suitable for indoor decorative and artistic use, supporting versatile installation methods for dynamic lighting designs.



Cuttable



One Bin



UV protected



Solvent Resistant



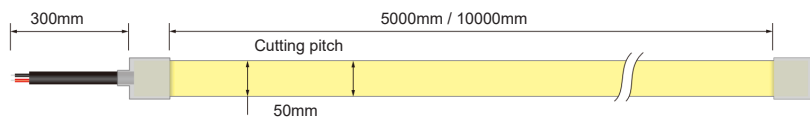

Saltwater Resistant

2700K
3000K
4000K
6000KCRI
Ra > 90

DIMMABLE

IP Rated
IP 65

CE

DIMENSION**TECHNICAL PARAMETERS**


Input Voltage	12V DC 24V DC
Wattage	5W/M 10W/m
Lumens Output	529lm/m @ 3000K
Colour Temp.	2700K 3000K 4000K
CRI	>90
MacAdam Step	≤2 SDCM (binning consistency)
IP Rating	IP65 IP67
Operating Temp.	-20°C to +55°C
Reel Length	5m 10m
Cutting Pitch	50mm
Lifespan	>50,000 hrs
Dimmable	TRIAC 0-10V DALI
Material	Dow SILASTIC™ ET-7021

END CAPS & CABLE LEAD OPTIONS


Front Cable Entry



Closed end cap

ACCESSORIES

PC Profile



PC Clips

ORDERING CODE

ARC – FR010625 – 24V – 3000K – 90CRI – IP65 – 10M
[Brand] – [Series] – [Voltage] – [CCT] – [CRI] – [IP Rating] – [Length]