


## TOP BEND - FT031616

A minimalist neon flexible built for architectural precision tight bend radius in both horizontal and vertical planes, dot free uniform emission, and consistent colour across runs of any length with constant current and constant voltage drive options. Outdoor and harsh environment rated, it specifies identically across interior, semi exposed, and fully weatherproof zones no product change, no specification compromise.



Cuttable

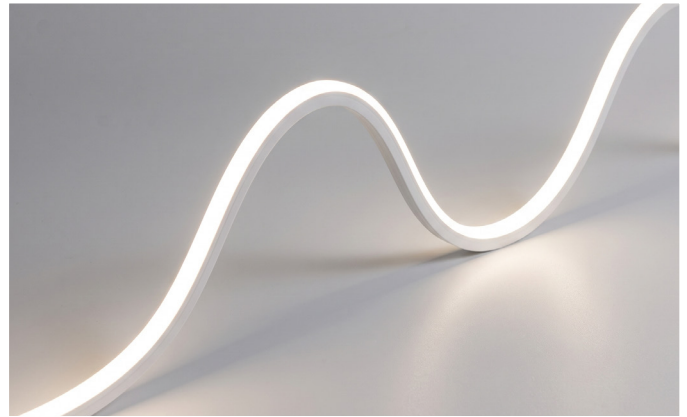

One Bin



UV protected



Solvent Resistant



Saltwater Resistant



2700K  
3000K  
4000K  
6000K



CRI  
Ra > 90



DIMMABLE





IP Rated  
65/67



CE

## DIMENSION

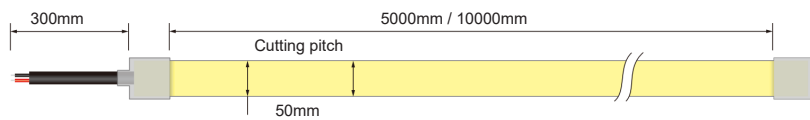


## TECHNICAL PARAMETERS

|                 |                               |
|-----------------|-------------------------------|
| Input Voltage   | 12V DC   24V DC               |
| Wattage         | 10W/m   15W/m                 |
| Lumens Output   | 802lm/w @ 3000K               |
| Colour Temp.    | 2700K   3000K   4000K         |
| CRI             | >90                           |
| MacAdam Step    | ≤2 SDCM (binning consistency) |
| IP Rating       | IP65   IP67                   |
| Operating Temp. | -20°C to +55°C                |
| Reel Length     | 5m   10m                      |
| Cutting Pitch   | 50mm                          |
| Lifespan        | >50,000 hrs                   |
| Dimmable        | TRIAC   0-10V   DALI          |
| Material        | Dow SILASTIC™ ET-7021         |

## END CAPS & CABLE LEAD OPTIONS



Front Cable Entry



Side Cable Entry




Bottom Cable Entry




Closed end cap

## ACCESSORIES



Aluminium Profile



Aluminium Clips



SS Clips



Curved SS Profile

## ORDERING CODE

**ARC – FT031616 – 24V – 3000K – 90CRI – IP65 – 10M**  
 [Brand] – [Series] – [Voltage] – [CCT] – [CRI] – [IP Rating] – [Length]