

WALL WASHER - FW011910

This Wall Washer Luminaire is built with TPU material that resists yellowing, high temperatures, corrosion, and weak acids and alkalis, while PU glue sealing ensures strong adhesion, durability, and long-term reliability. As a compact, lightweight, and flexible alternative to traditional wall washer lights and LED strips, it offers multiple beam angles to suit a wide range of architectural and decorative lighting applications.



Cuttable



One Bin



UV protected



Solvent Resistant



Saltwater Resistant


2700K
3000K
4000K
6000K


CRI
90


DIMMABLE


IP Rated
IP67


CE

DIMENSION

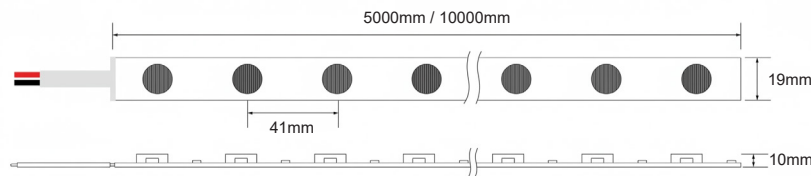

TECHNICAL PARAMETERS

Input Voltage	12V DC 24V DC
Wattage	18W/m
Lumens Output	1745lm/m @ 4000K
Beam Angle	15° 30° 45° 60°
Colour Temp.	2700K 3000K 4000K
CRI	>90
MacAdam Step	≤2 SDCM (binning consistency)
IP Rating	IP65 IP67
Operating Temp.	-20°C to +55°C
Reel Length	5m 10m
LED To LED Lendgth	41mm
Lifespan	>50,000 hrs
Dimmable	TRIAC 0-10V DALI
Material	Dow SILASTIC™ ET-7021

ACCESSORIES



Aluminium Profile



SS Clips

ORDERING CODE

ARC – FW011910 – 24V – 3000K – 90CRI – IP65 – 10M

[Brand] – [Series] – [Voltage] – [CCT] – [CRI] – [IP Rating] – [Length]